

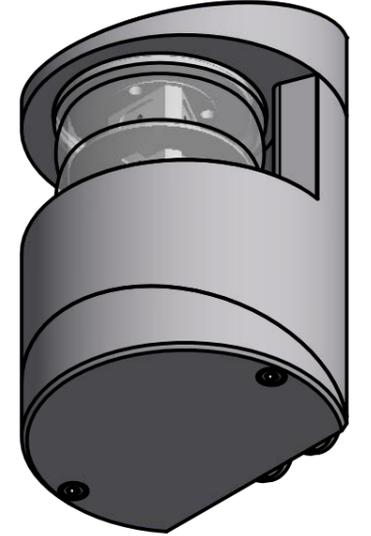
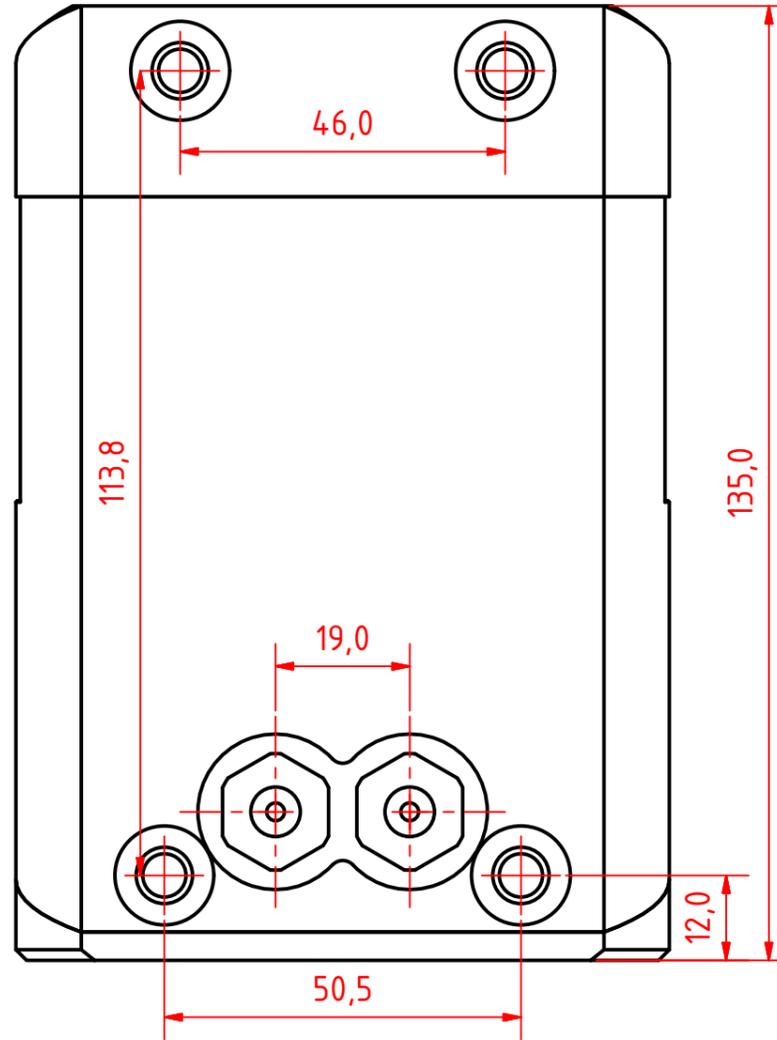
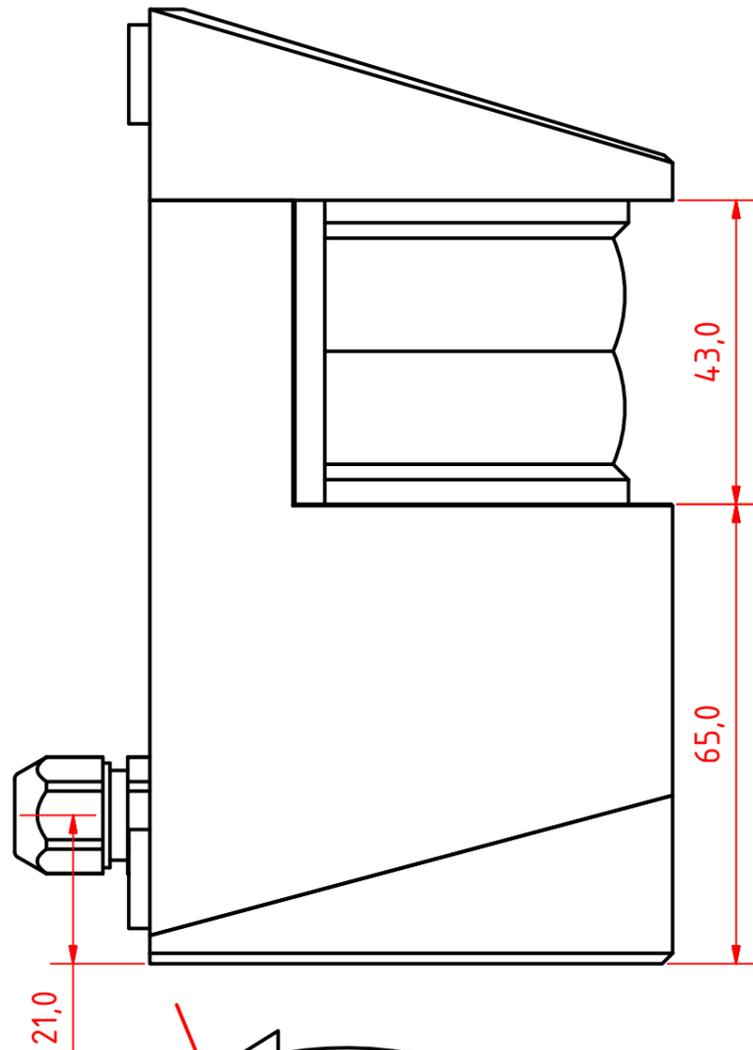
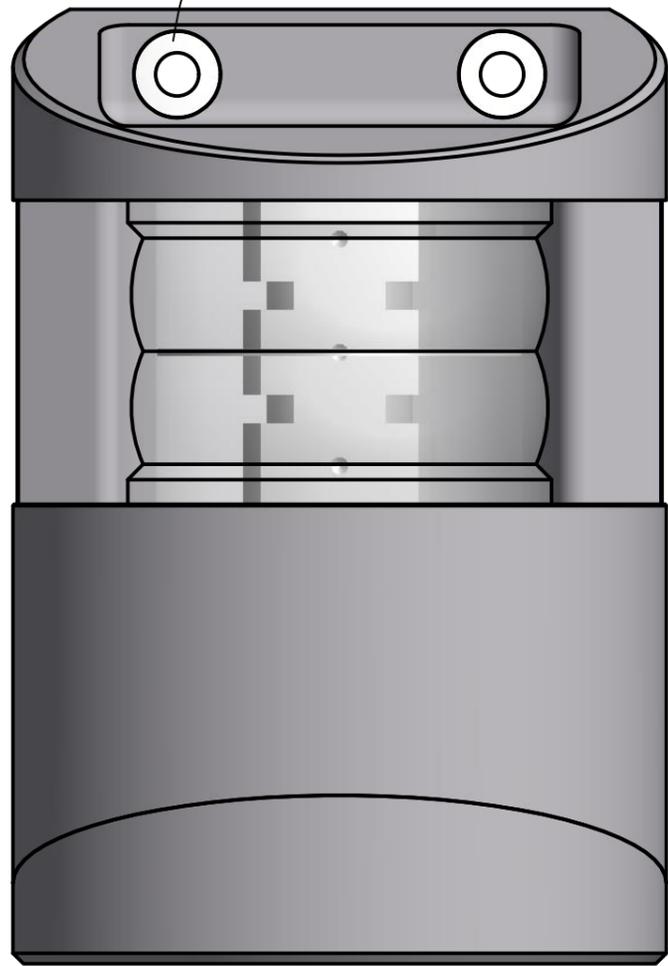


Nylon Insulators for 4 pcs. 6mm DIN 912 mounting Screws

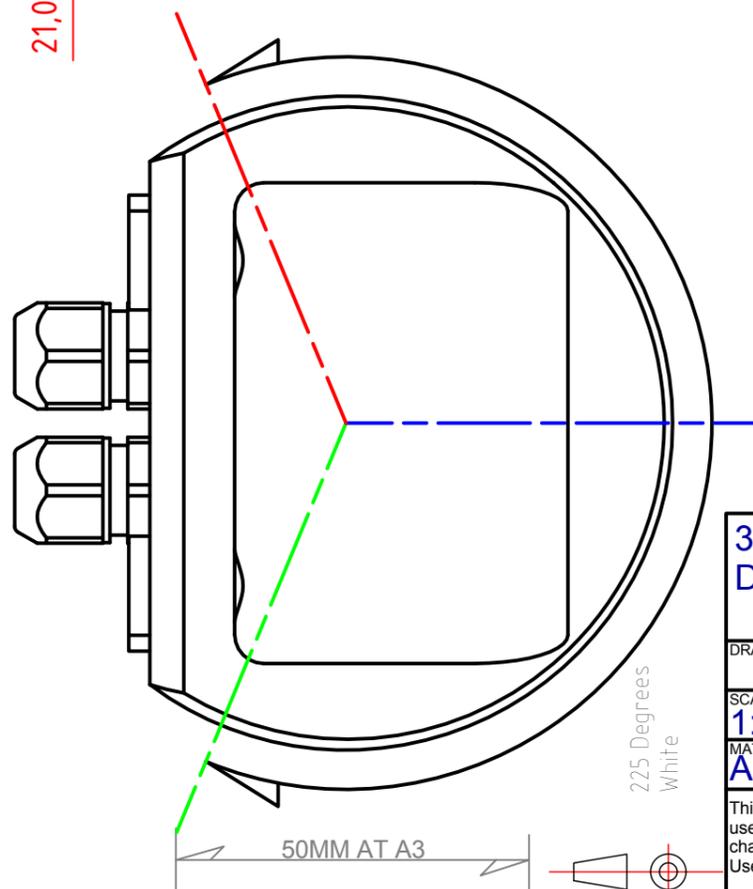

Rubber insulator rings keep the lantern isolated from the superstructure.

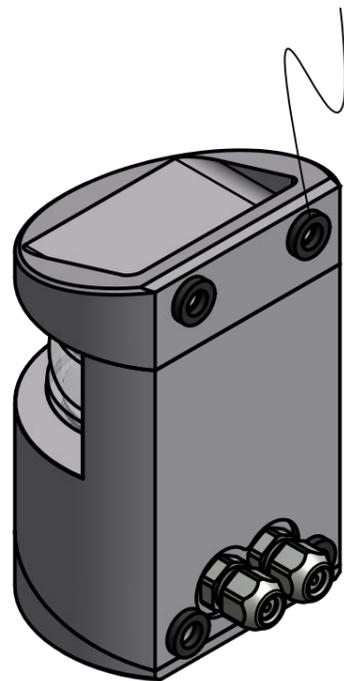

- For a Cable Down Version of this Lantern please refer to Drawing No. 300-139CD
- Surfaced with 50 microns of "Graphite" coloured anodizing.

**300-139 6nm Masthead, Vertical Mount, Double w Cable Aft**

DRAWING NO.: <b>300-139</b>	REV. NO.:	SIZE: <b>A3</b>	DRAWN BY: <b>Paul</b>
SCALE: <b>1:1</b>	TOLERANCES: <b>DS/ISO 2768-f</b>	REVIEWED BY: <b>PHH</b>	

MATERIAL DESCRIPTION:  
**Aluminium & Acrylic**

This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.



Lopolight ApS  
Ved Klaedebo 12  
DK-2970, Hoersholm  
Denmark

Tel:(+45) 32 48 50 30 Fax:(+45) 32 48 50 32  
info@lopolight.com